


Reflective tape T-6500

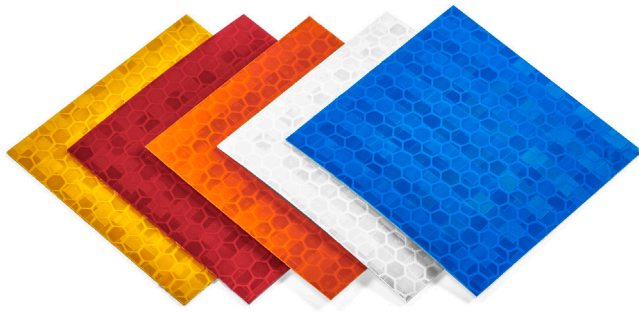

REFLEKTOR DATEN

Application	Reflective tape
Item	T-6500
Item no.	10356112

TECHNICAL SPECIFICATIONS

Shape	roll
Size (LxWxH)	45700x1220x0,4 mm
Reflective size (LxW)	45700x1220 mm
Tolerance	TG7 [DIN 16742]
Mounting	to be glued (with tape)
Chemical resistance	Standard
Protection	IP67
Operating temp.	-20°C to +65°C
Surface	Standard
Optical structure	rhombus
Optic size	micro triple SW0,3
Polarizing rotation	yes
Application	Road equipment

Standard dimensions reflective tape T6500

item.-no.:	dimension	colour
11362110	10mm x 45,70m	white
10536110	15mm x 45,7m	white
10536130	15mm x 45,7m	red
10356110	25mm x 45,7m	white
10366110	50mm x 45,70m	white
06046130	80mm x 45,70m	red
10526110	100mm x 45,70m	white
21256110	150mm x 45,70m	white
20226110	250mm x 45,70m	white
10356112	1220mm x 45,70m	white

MATERIAL DATA

Material reflektor	PMMA clear
--------------------	------------

DESCRIPTION

A high reflex performance is offered by the reasonably priced standard reflective tape T6500 with micro prism structure. The reflective tape is very well suited for use in traffic management, traffic signs and markings. The film is available in various colours. It is suitable for outdoor use. In addition to UV resistance and a durability of up to 10 years, the self-adhesive backing and the stampability and cuttability are further features that characterize this product. The T6500 reflective tape is available as rolls up to 45.7 m in length and up to a width of 1220 mm and as shapes and stamped parts.