


Reflective tape T-7500

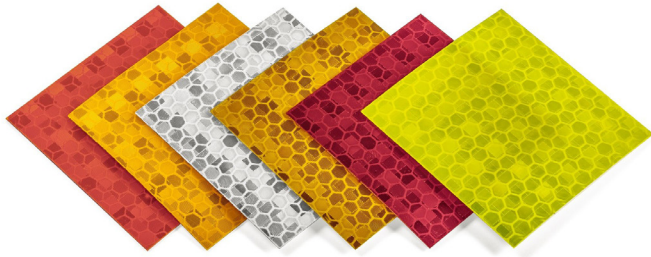

Reflective tape

Standard dimensions reflective tape T7500

item.-no.:	dimension	colour
05176110	10mm x 45,70m	white
07206110	15mm x 45,7m	white
07216110	20mm x 45,7m	white
04116110	25mm x 45,7m	white
05186110	30mm x 45,7m	white
05186150	30mm x 45,7m	blue
04126110	50mm x 45,70m	white
04126130	50mm x 45,70m	red
04136110	75mm x 45,70m	white
04136120	75mm x 45,70m	amber
04136130	75mm x 45,70m	red
04186110	100mm x 45,70m	white
04186150	100mm x 45,70m	blue
05616110	150mm x 45,70m	white
07806110	200mm x 45,70m	white
07766110	300mm x 45,70m	white
07576112	500mm x 45,70m	white
06106111	920mm x 45,70m	white
07556110	1220mm x 45,70m	white

REFLEKTOR DATEN

Application	Reflective tape
Item	T-7500
Item no.	07556110

TECHNICAL SPECIFICATIONS

Shape	roll
Size (LxWxH)	45700x1220x0,4 mm
Reflective size (LxW)	45700x1220 mm
Tolerance	TG5 [DIN 16742]
Mounting	to be glued (with tape)
Chemical resistance	Standard
Protection	IP67
Operating temp.	-20°C to +65°C
Surface	Standard
Optical structure	rhombus
Optic size	micro triple SW0,3
Polarizing rotation	yes
Application	Standard sensors

MATERIAL DATA

Material reflektor	PMMA clear
--------------------	------------

DESCRIPTION

A very high reflex performance is offered by the reasonably priced standard reflective tape T7500 with micro prism structure. The reflective tape is very well suited for applications with standard photoelectric sensors and laser distance measuring devices. It can be used at temperatures from -40 °C to +70 °C and is suitable for outdoor use. In addition to UV resistance and a shelf life of up to 10 years, the self-adhesive backing and the stampability and cuttability are further features that characterize this product. The T7500 reflective foil is available as rolls up to 45.7 m in length and up to a width of 1220 mm and as shapes and stamped parts.